

Taraflex® Recreation

Introducing another member to our world-class sports flooring family.



Comfort
1.51m x 20.51m

P1

≥ 25% Shock Absorption

Hygienic

Easy to Clean

PUR Protect®

Easy to Maintain

100% recyclable

Environmentally Friendly



Taraflex® Recreation has a safe and cushioned surface perfect for many sports. Offering good levels of shock absorption and excellent value for money.

- Ideal for light leisure and sporting activities
- Comfortable and quiet underfoot
- Easy to clean and low maintenance
- Available in popular colourways

SUITABLE FOR:

- Infant Schools
- Junior Schools
- School Indoor Sports
- Youth Club Activities

FOR MORE INFORMATION PLEASE CONTACT:

+44 (0) 3332 412 901

www.gerflor.co.uk

contractuk@gerflor.com

[@gerflorsportsuk](https://twitter.com/gerflorsportsuk)



2402 Azul



6614 Oceano



6058 American Oak




6062 Canadian Maple




2711 Gris




6563 Menta




6154 Roja



6157 Rosa



6160 Naranja




6556 Verde

Don't forget to ask for CR50 weld rods and adhesives!



Gerflor
theflooringgroup

PRODUCT CONSTRUCTION

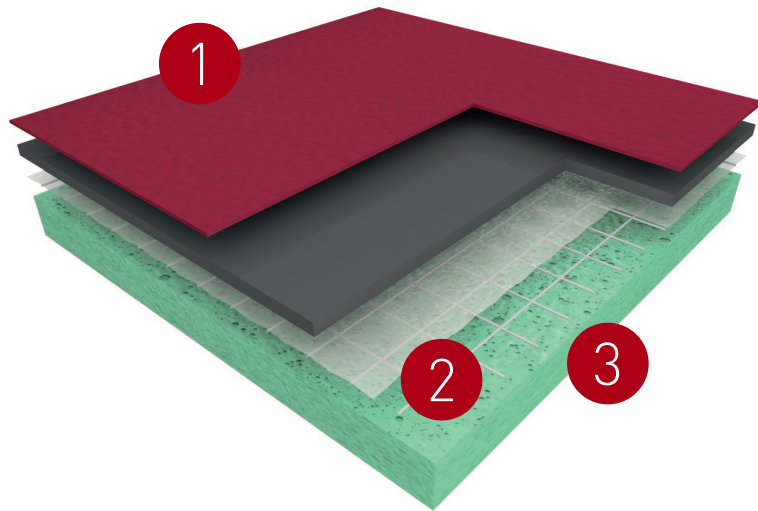

1. PUR Protect® easy to clean surface
2. Flexible fibreglass interlayer
3. Closed-cell foam backing

FOR MORE INFORMATION PLEASE CONTACT:

+44(0)3332 412 901



www.gerflor.co.uk

@contractuk@gerflor.com



@gerflorsportsuk

Gerflor
theflooringgroup

Product Description	Standard	Requirement	Unit	Taraflex® Recreation
Surface treatment	-	-	-	PUR Protect®
Surface complex	-	-	-	100% PVC
Foam	-	-	-	Closed cell foam
Thickness	EN 428	-	mm	6
Weight	EN 430	-	kg/m ²	3.7
Length ^[1]	EN 426	-	lm	20.5 Standard
Width	EN 426	-	lm	1.5
SPORT PROPERTIES				
Shock absorption	EN 14808	≥ 25	%	P1
Vertical deformation	EN 14809	≤ 3.5	mm	≤ 3.5
Energy return	NF P 90 203	≥ 0.31	m/s	≥ 0.31
Sliding coefficient	EN 13036-4	80 to 110	-	80 - 110
Ball bounce	EN 12235	≥ 90	%	≥ 90
TECHNICAL CHARACTERISTICS				
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 350
Impact resistance	EN 1517	≥ 8	N/m	≥ 8
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5
CLASSIFICATION				
Fire	EN 13501-1	-	-	
Anti-bacterial activity (E. coli - S. aureus - MRSA) ^[2]	ISO 22196	-	-	> 99% inhibits growth
CE MARKING				
	EN 14904	-	-	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Resistance to rolling load

^[1] For different roll lengths, please contact us. ^[2] The implementation of an effective cleaning method is the best defence against infection. For more information please visit: www.gerflor.co.uk



CI SIB	(43)	Tn6
--------	------	-----

UK reference - January 2021